


RHINOCEROS

KS925

MINI SKID STEER

DIMENSIONS (STD)	U.S.	METRIC
Machine weight (no attachment,fluids full)	3306.9lb	1500kg
Operating capacity		
35% tipping capacity	1000lb	454kg
Tipping capacity	2861.6lb	1298kg
A Operating height,max std.bucket	117in	2980mm
B Hinge pin height,max	86.5in	2210mm
C Overall machine height	56in	1420mm
D Overall length of machine,std.bucket	117in	2980mm
E Overall length of loader,no attachment	83.5in	2120mm
F Wheelbase/track length	46.5in	1180mm
G Unloading height	69in	1750mm
H Unloading distance	25in	630mm
I Ground clearance,min	5.7in	145mm
J Angle of departure	33°	
K Angle of approach	25°	
L Track outer width	22in	560mm
M Angle of unloading	25°	
N Max. horizontal pushing depth	3.5in	90mm
O Overall width	36.7in	932mm
P Track width,max	36.2in	920mm
Q Track's width	7in	180mm
POWER	U.S.	METRIC
Model No.	Kubota D1105	
Fuel	Diesel	
Gross power rating	19.31hp	14.2Kw
Emissions compliance	EPA Tier 4	EU Stage V
Number of cylinders	3	
Displacement	68.53 in³	1.123L
Rated speed	2300rpm	

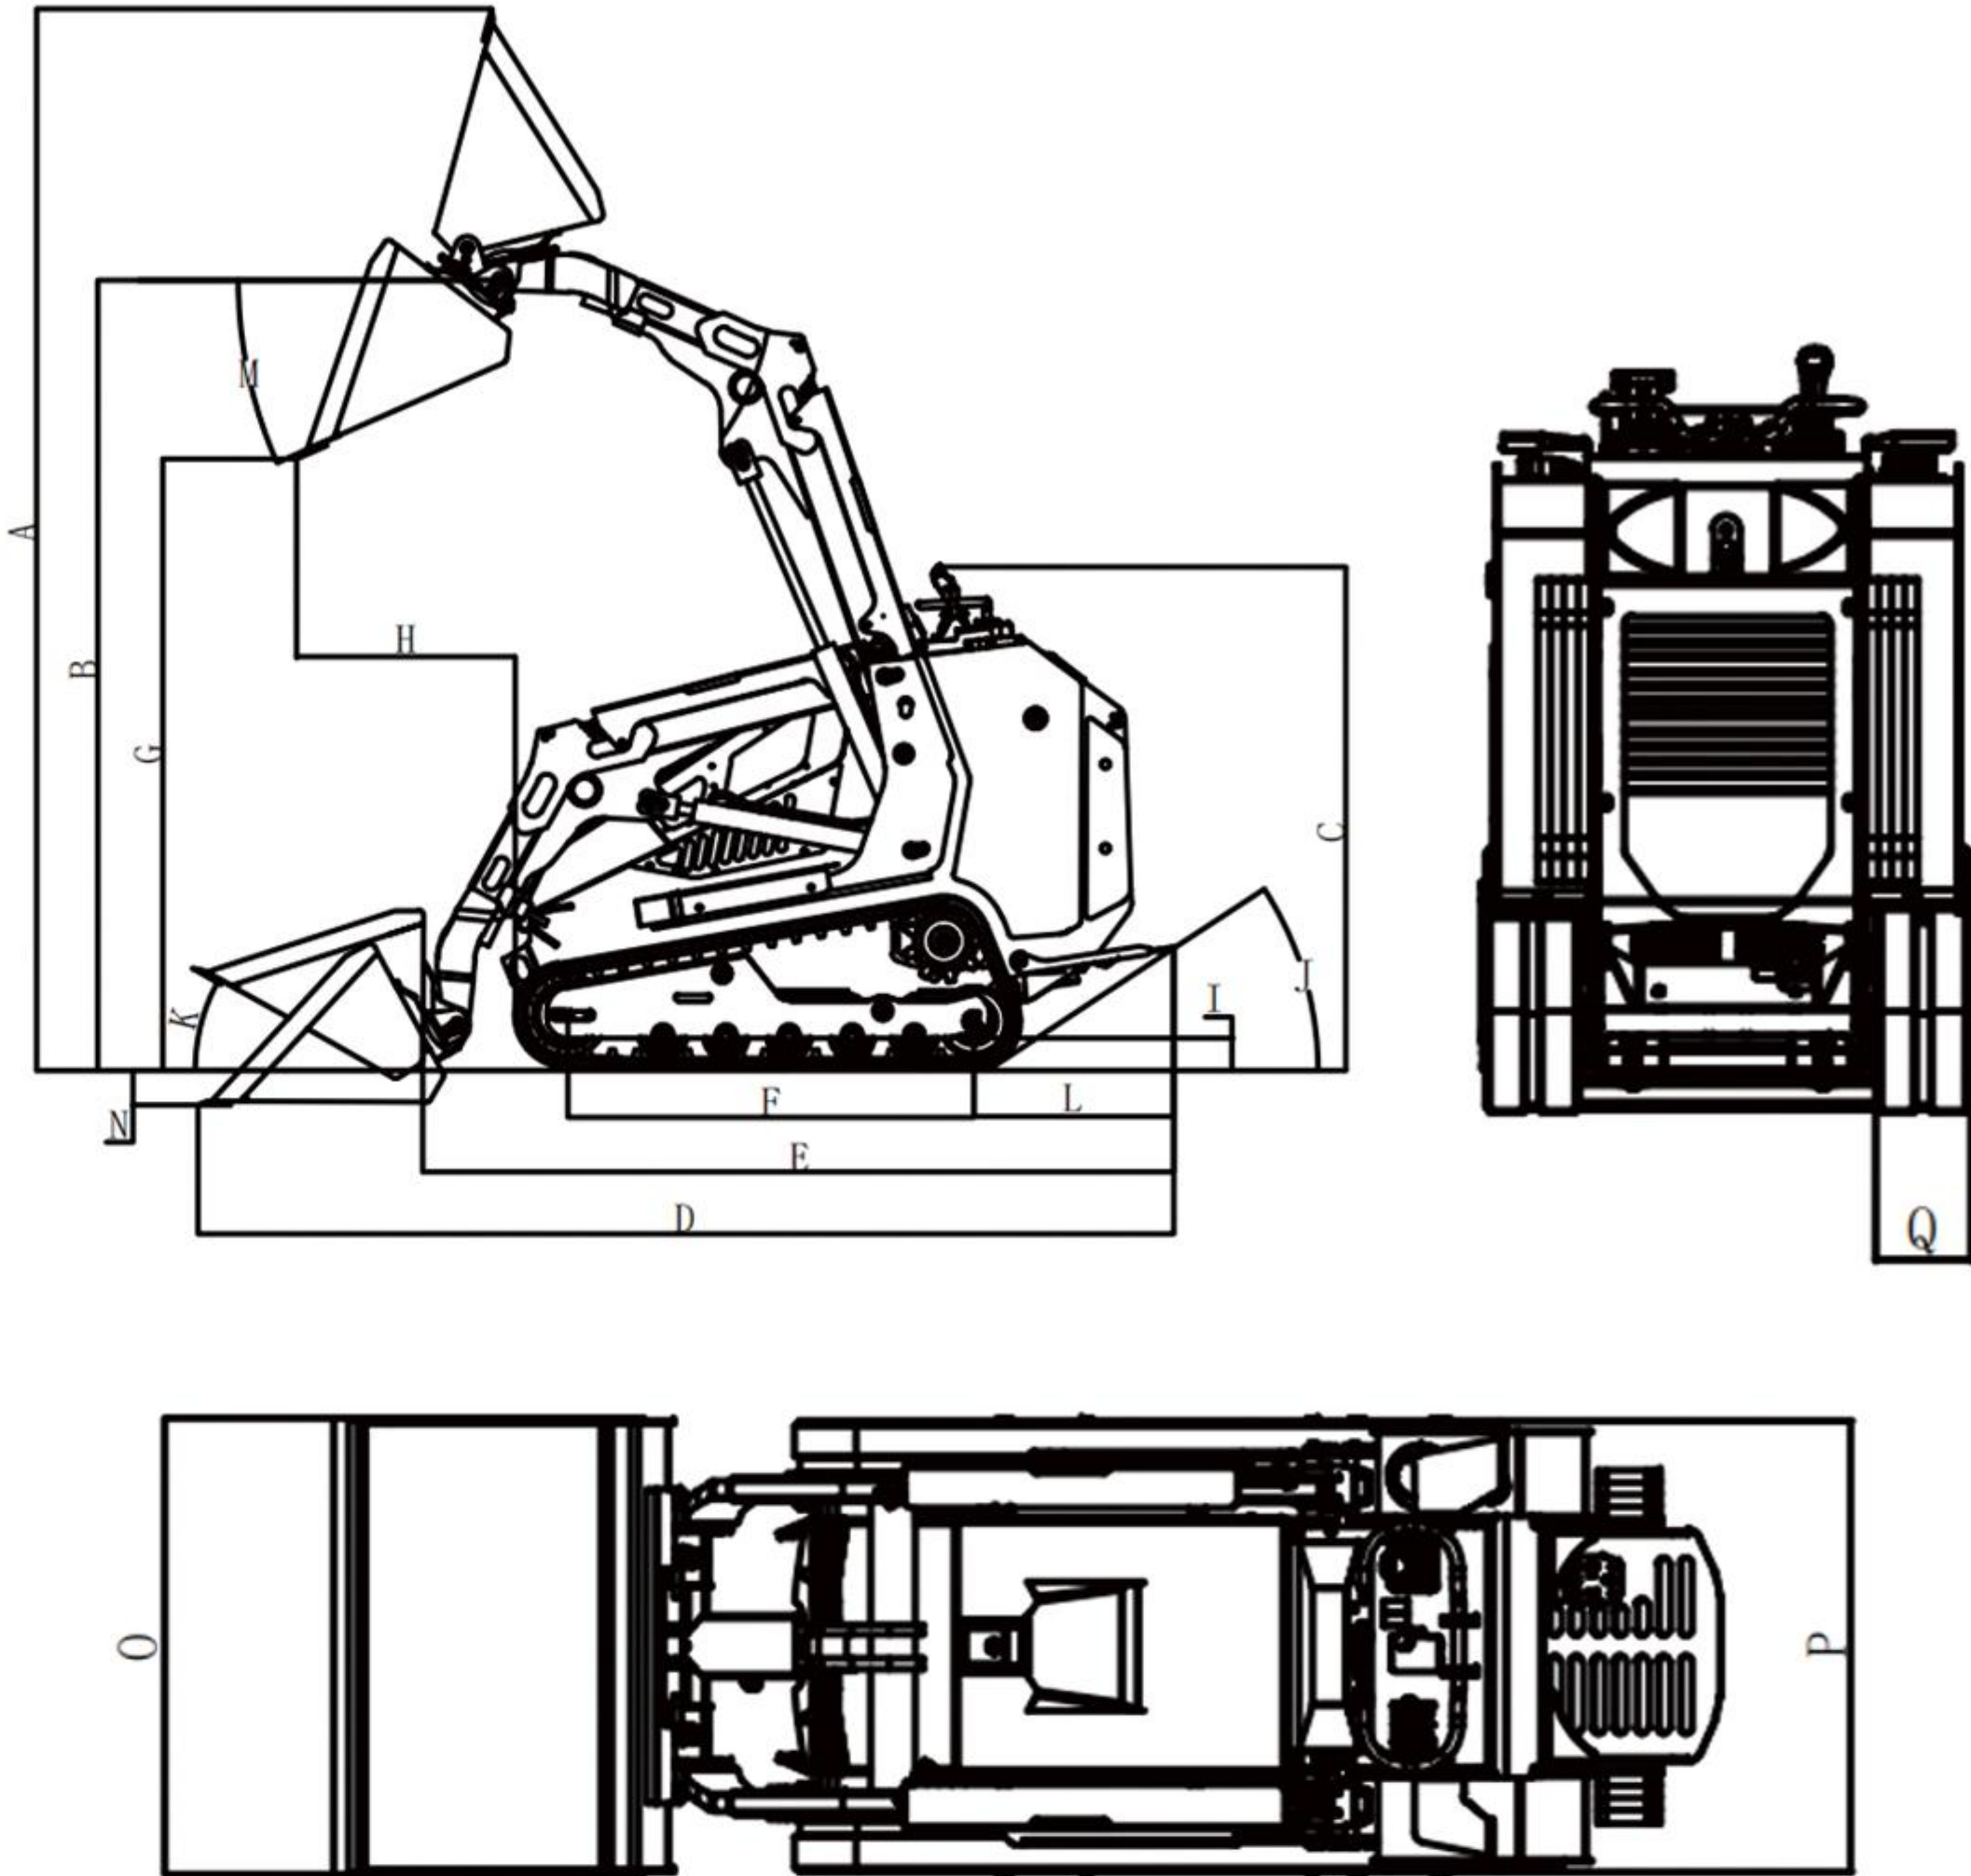

OPERATION	U.S.	METRIC
Ground drive speed		
Forward/Reverse	3.1mph	5km/h
Ground pressure(ISO/CD 16754)		
7-In(180-mm)tracks	4.78psi	0.33bar

HYDRAULIC SYSTEM I		
Auxiliary circuit		
Piston pump		
Flow rate	404.gpm	89L/min
Pressure	2900.75psi	200bar

FLUID CAPACITIES		
Fuel tank capacity		42L
Lubricating oil capacity		4L
Hydraulic reservoir capacity		40L

BATTERY		
SAE reserve capacity rating		110min
SAE cold crank@ 0° F (-18°C)		800amps
Electrical system		12V

www.rhinoexcavator.com



SHANDONG KEN STONE HEAVY MACHINERY CO.,LTD



Address : Dingyuanzhai Industrial Park,Guan County,Liaocheng city, Shandong Province, China
Postal code : 252512
Website : www.rhinoexcavator.com
E-mail : office@sdxiniu.com

Factory visit



Valve:JINGKEN
Main Pump: JINGKEN
Traveling motor:HENGLI



KS925

MINI SKID STEER