

RHINOCEROS




XN18L

CRAWLER EXCAVATOR

SPECIFICATION		
Operating weight		1760kg
Working device form		Backhoe
Standard bucket capacity		0.027 cbm
Engine	Model No.	KUBOTA D902
	Displacement	0.898 L
	Rated power	11.8 kw/2500
	Max. torque	51.3 N.m
Speed and digging force	Max. travel speed	3.0 km/h
	Swing speed	8.5 rpm
	Max. gradeability	30%
Track material		Rubber
Hydraulic and liquid capacity	Pump type	Piston pump
	Work pressure	20 MPa
	Flow rate	39.6L/min
	Hydraulic oil tank capacity	15.3 L
Fuel tank capacity		18L

OPERATING RANGE		
A	Max.digging radius on ground	3616mm
B	Max.digging radius	3708mm
C	Max. digging depth	2204mm
D	Max. digging height	3224mm
E	Max. dumping height	2263mm
F	Max. vertical digging depth	1789mm
G	Min. swing radius	1591mm
H	Max. blade lifting height	197mm
I	Max. blade digging depth	202mm

MAIN DIMENSIONS		
a	Wheel base	1130mm
b	Track length	1447mm
c	Upper chassis ground clearance	406mm
d	Counterweight turning radius	724mm
e	Chassis width	990 (1240) mm
f	Track width	230mm
g	Track height	320mm
h	Transportation length	3327mm
i	Height of seat to ground	1600mm
j	Total height	2301mm
k	Boom swing - left	390mm
l	Boom swing - right	510mm

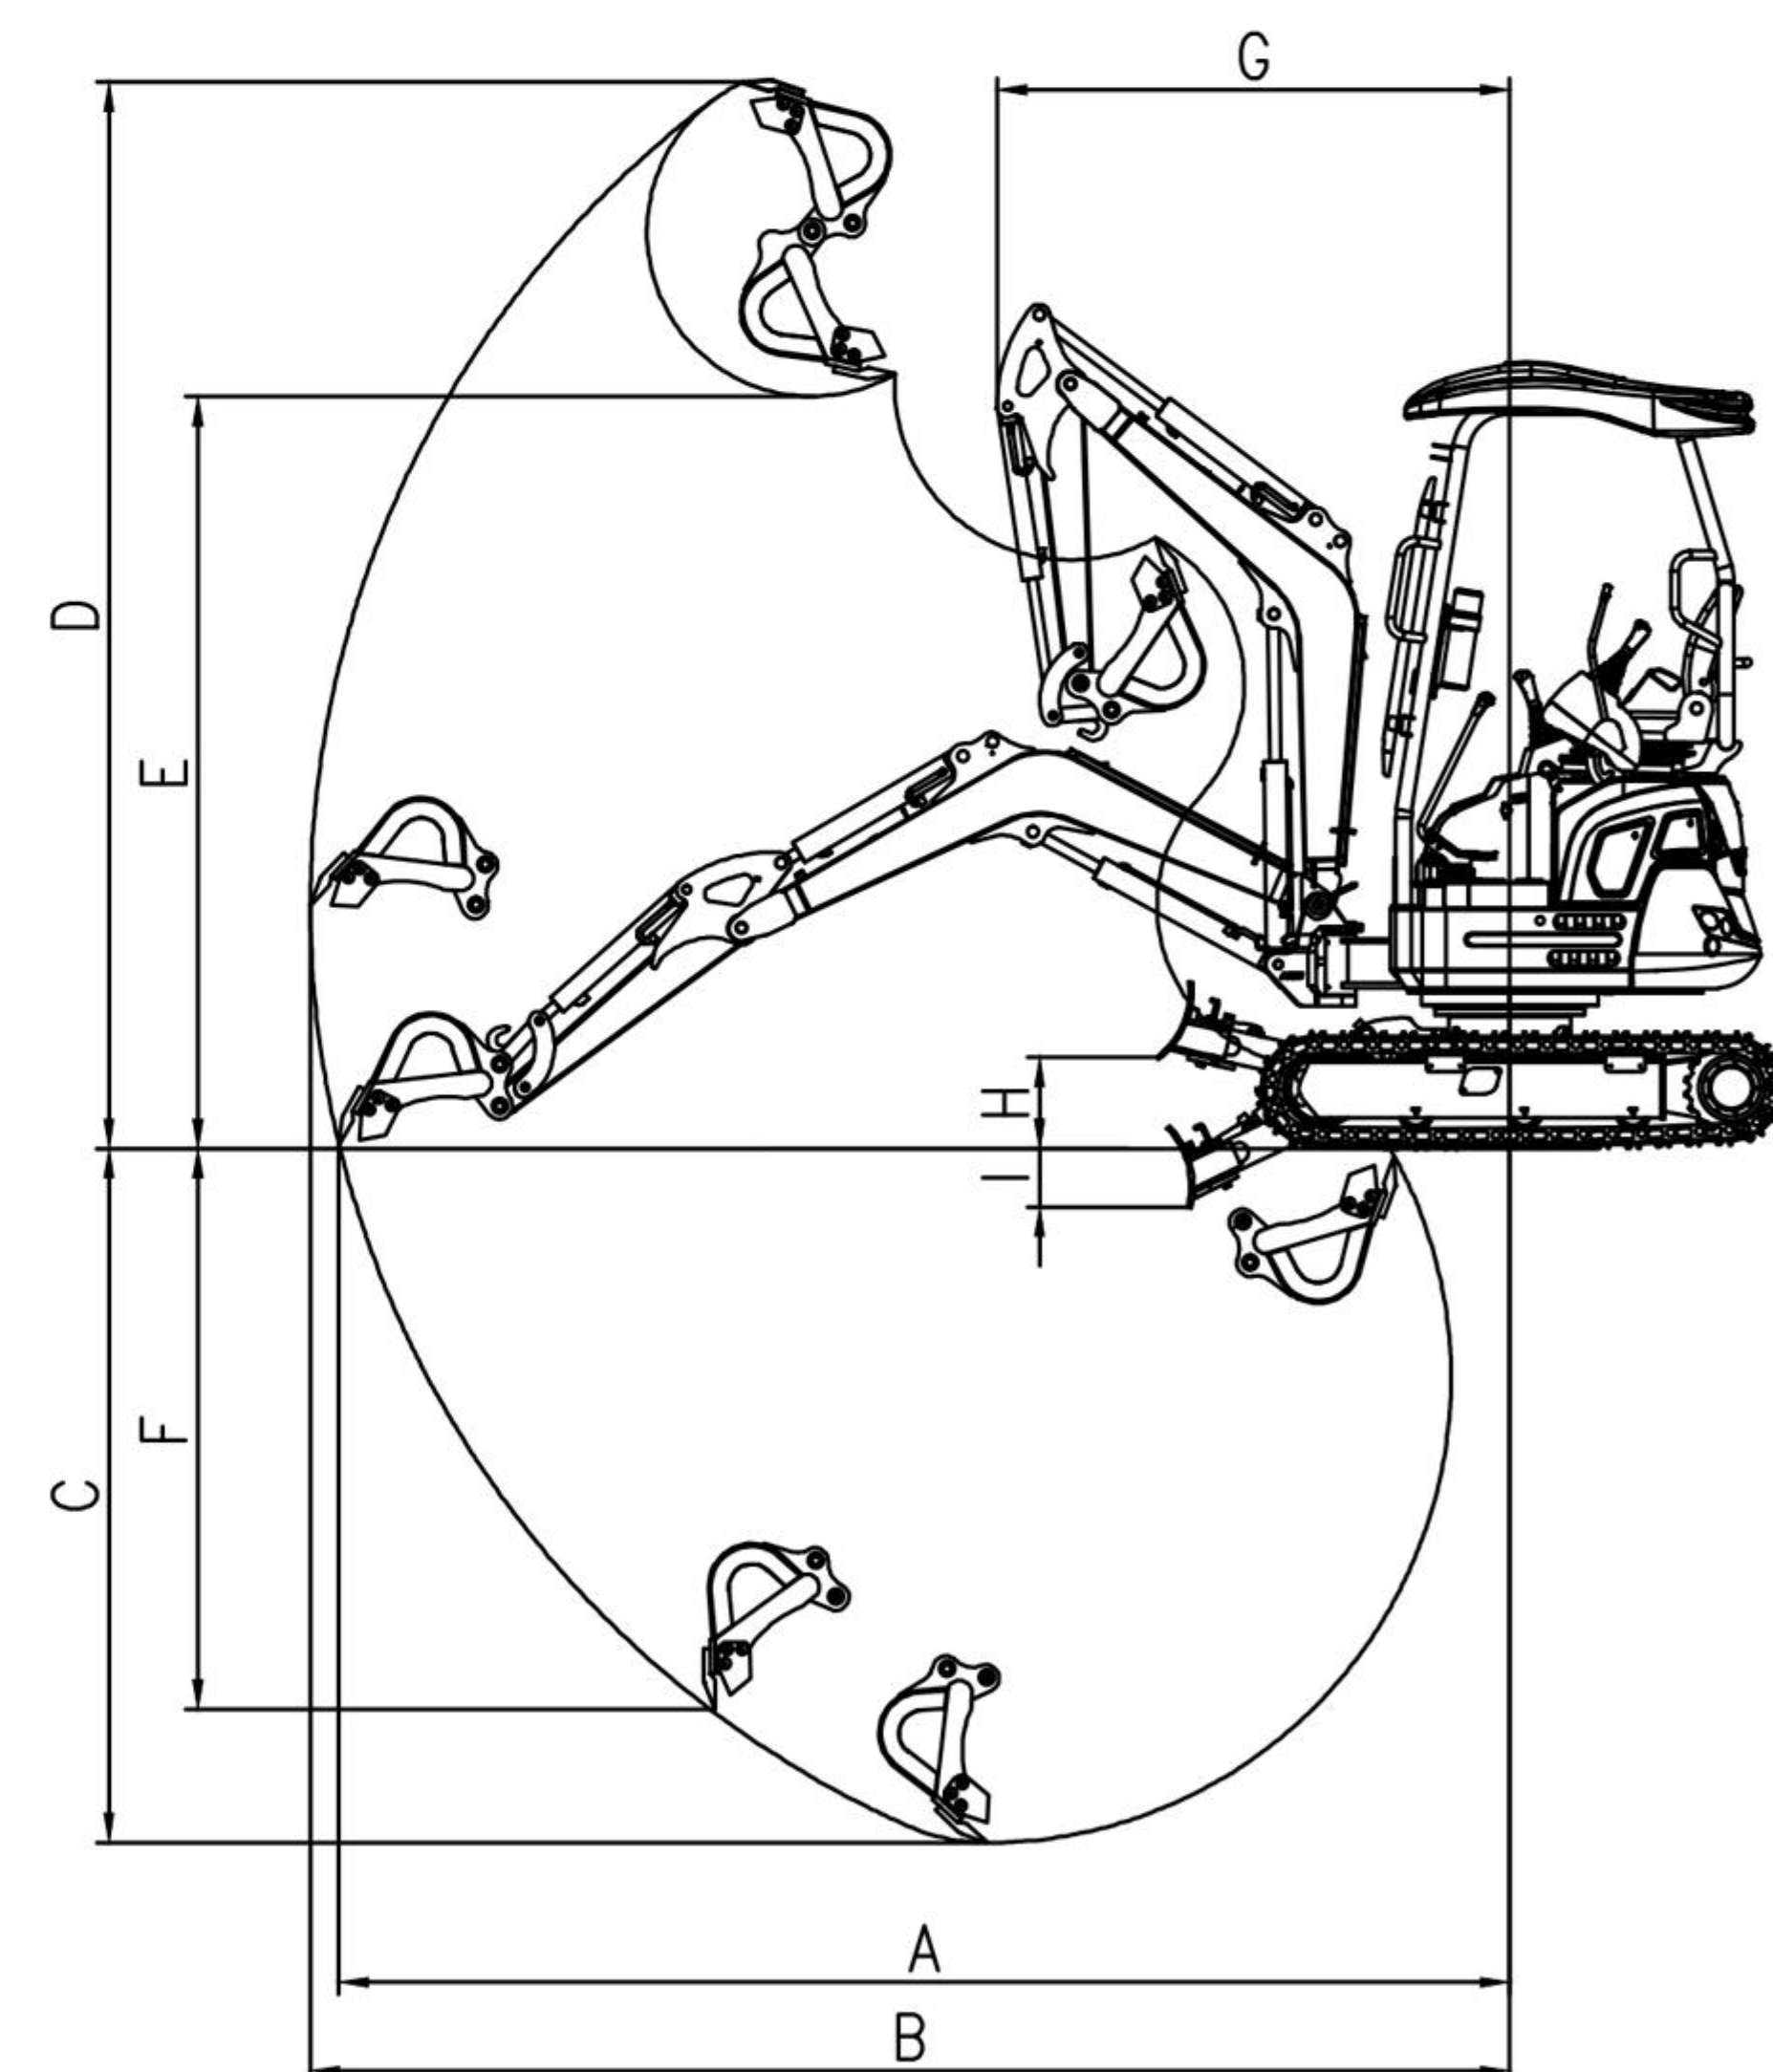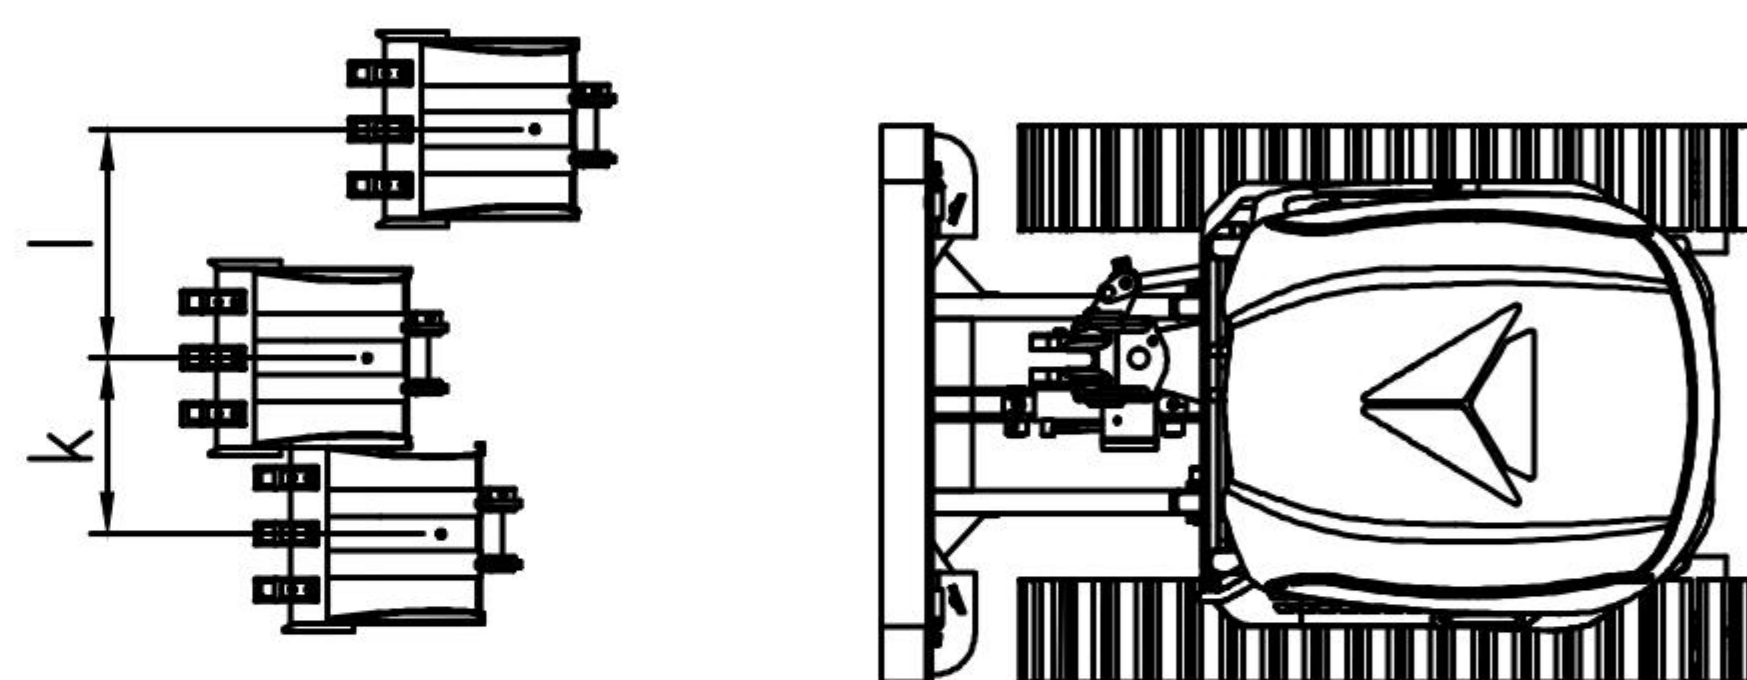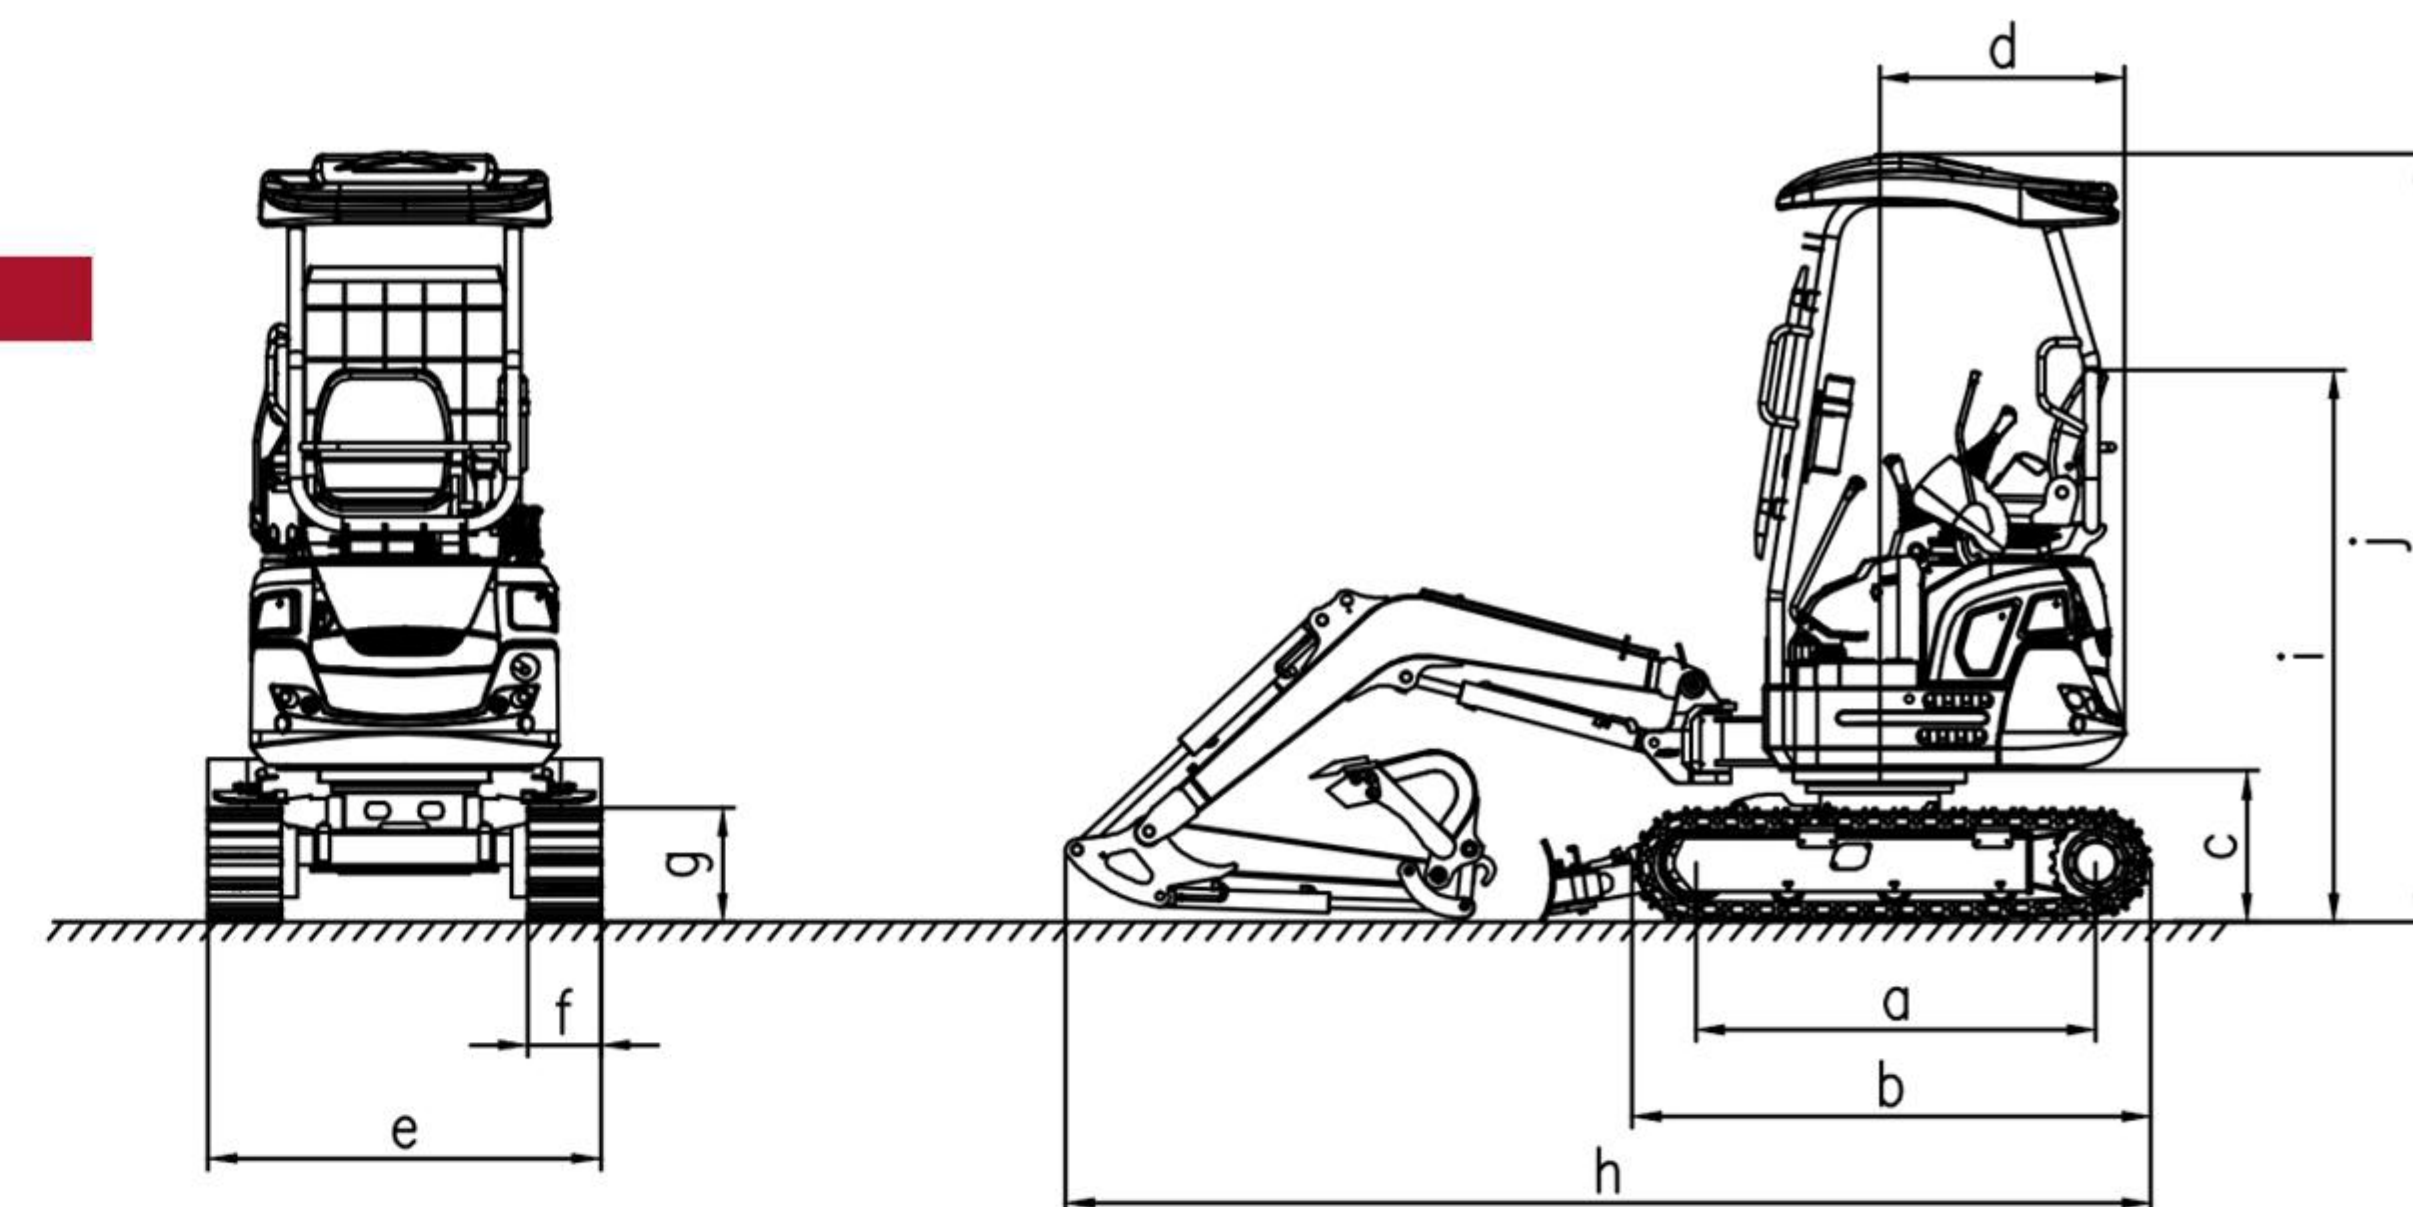

www.rhinoexcavator.com



Valve:TAIFENG
Pump:TAIFENG
Swing motor:Eaton
Traveling motor:EDDIE
Cylinder :SUQINGGE



SHANDONG KEN STONE HEAVY MACHINERY CO.,LTD



Factory visit

Address : Dingyuanzhai Industrial Park,Guan County,Liaocheng city, Shandong Province, China
Postal code : 252512
Website : www.rhinoexcavator.com
E-mail : office@sdxiniu.com

XN18L CRAWLER EXCAVATOR