
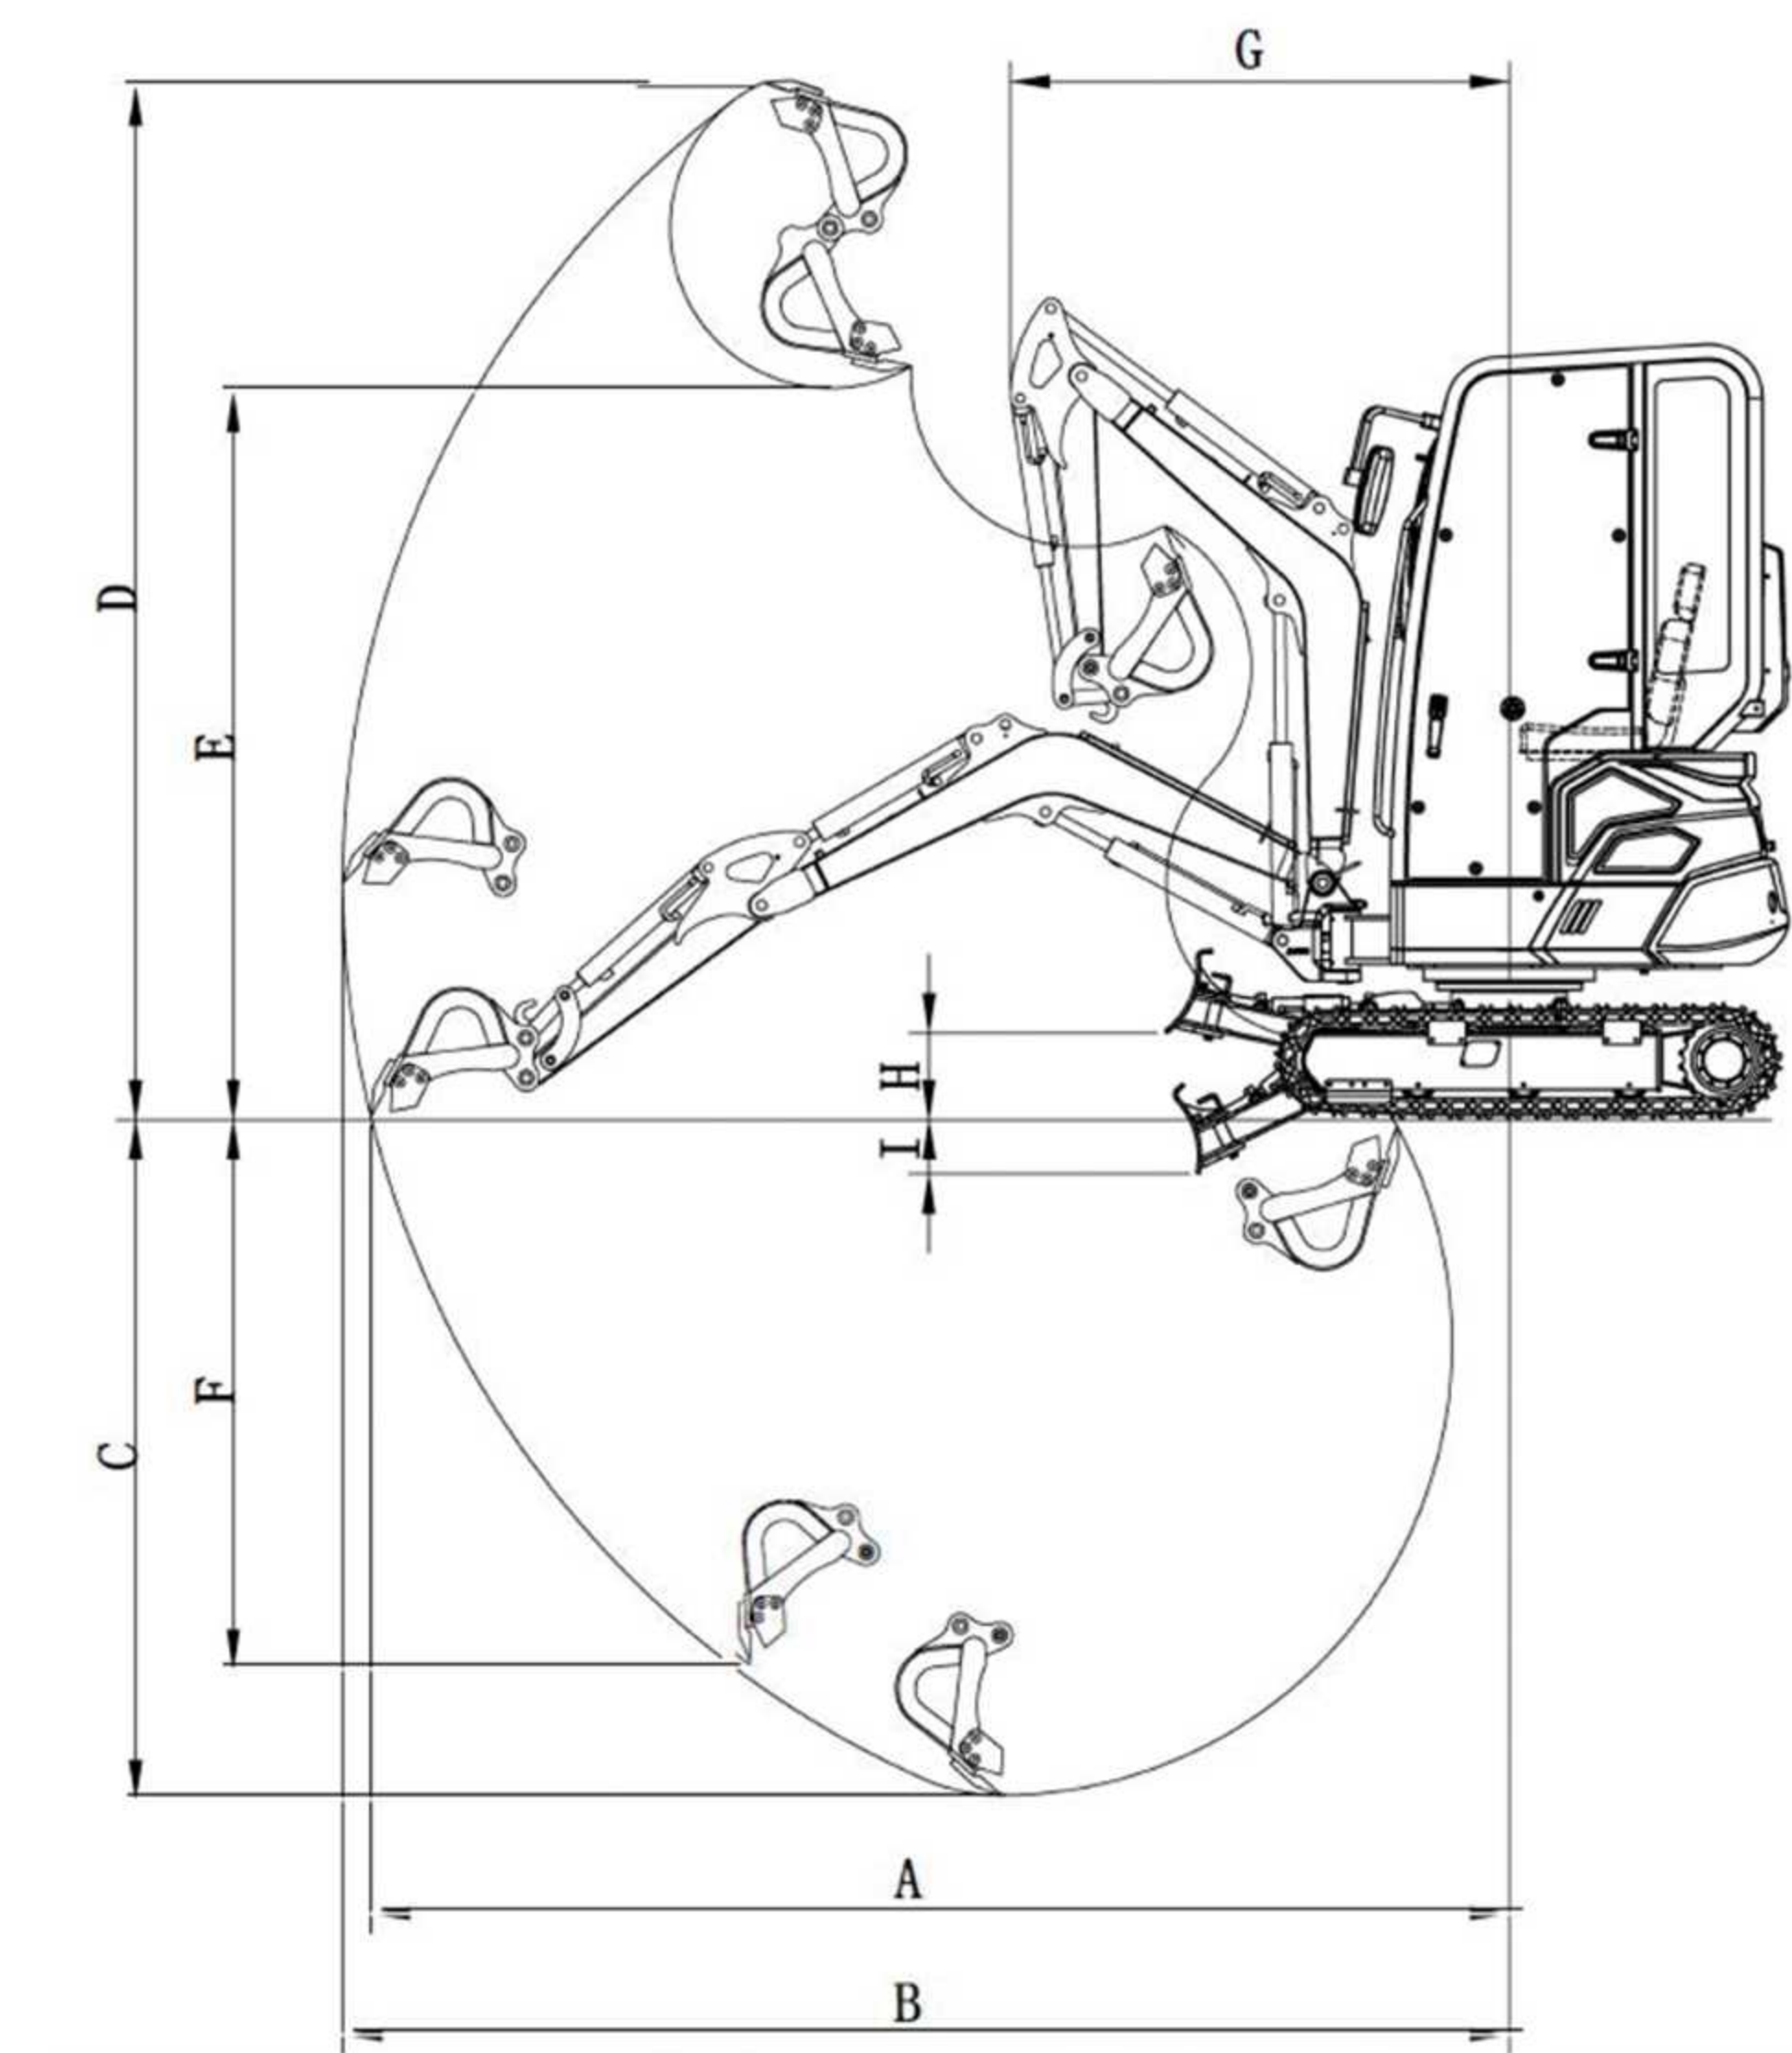
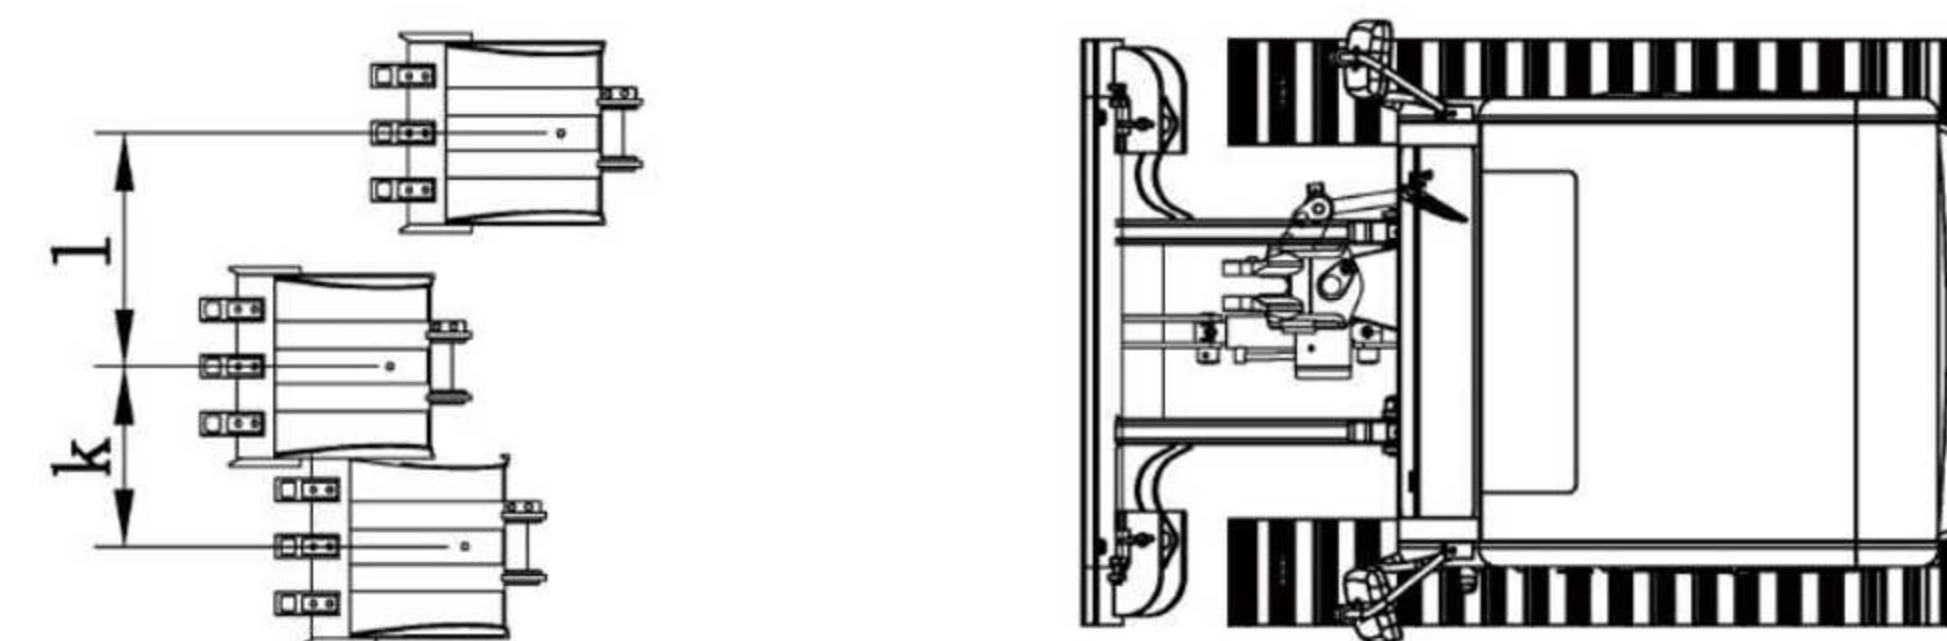


RHINOCEROS

XN20B

CRAWLER EXCAVATOR

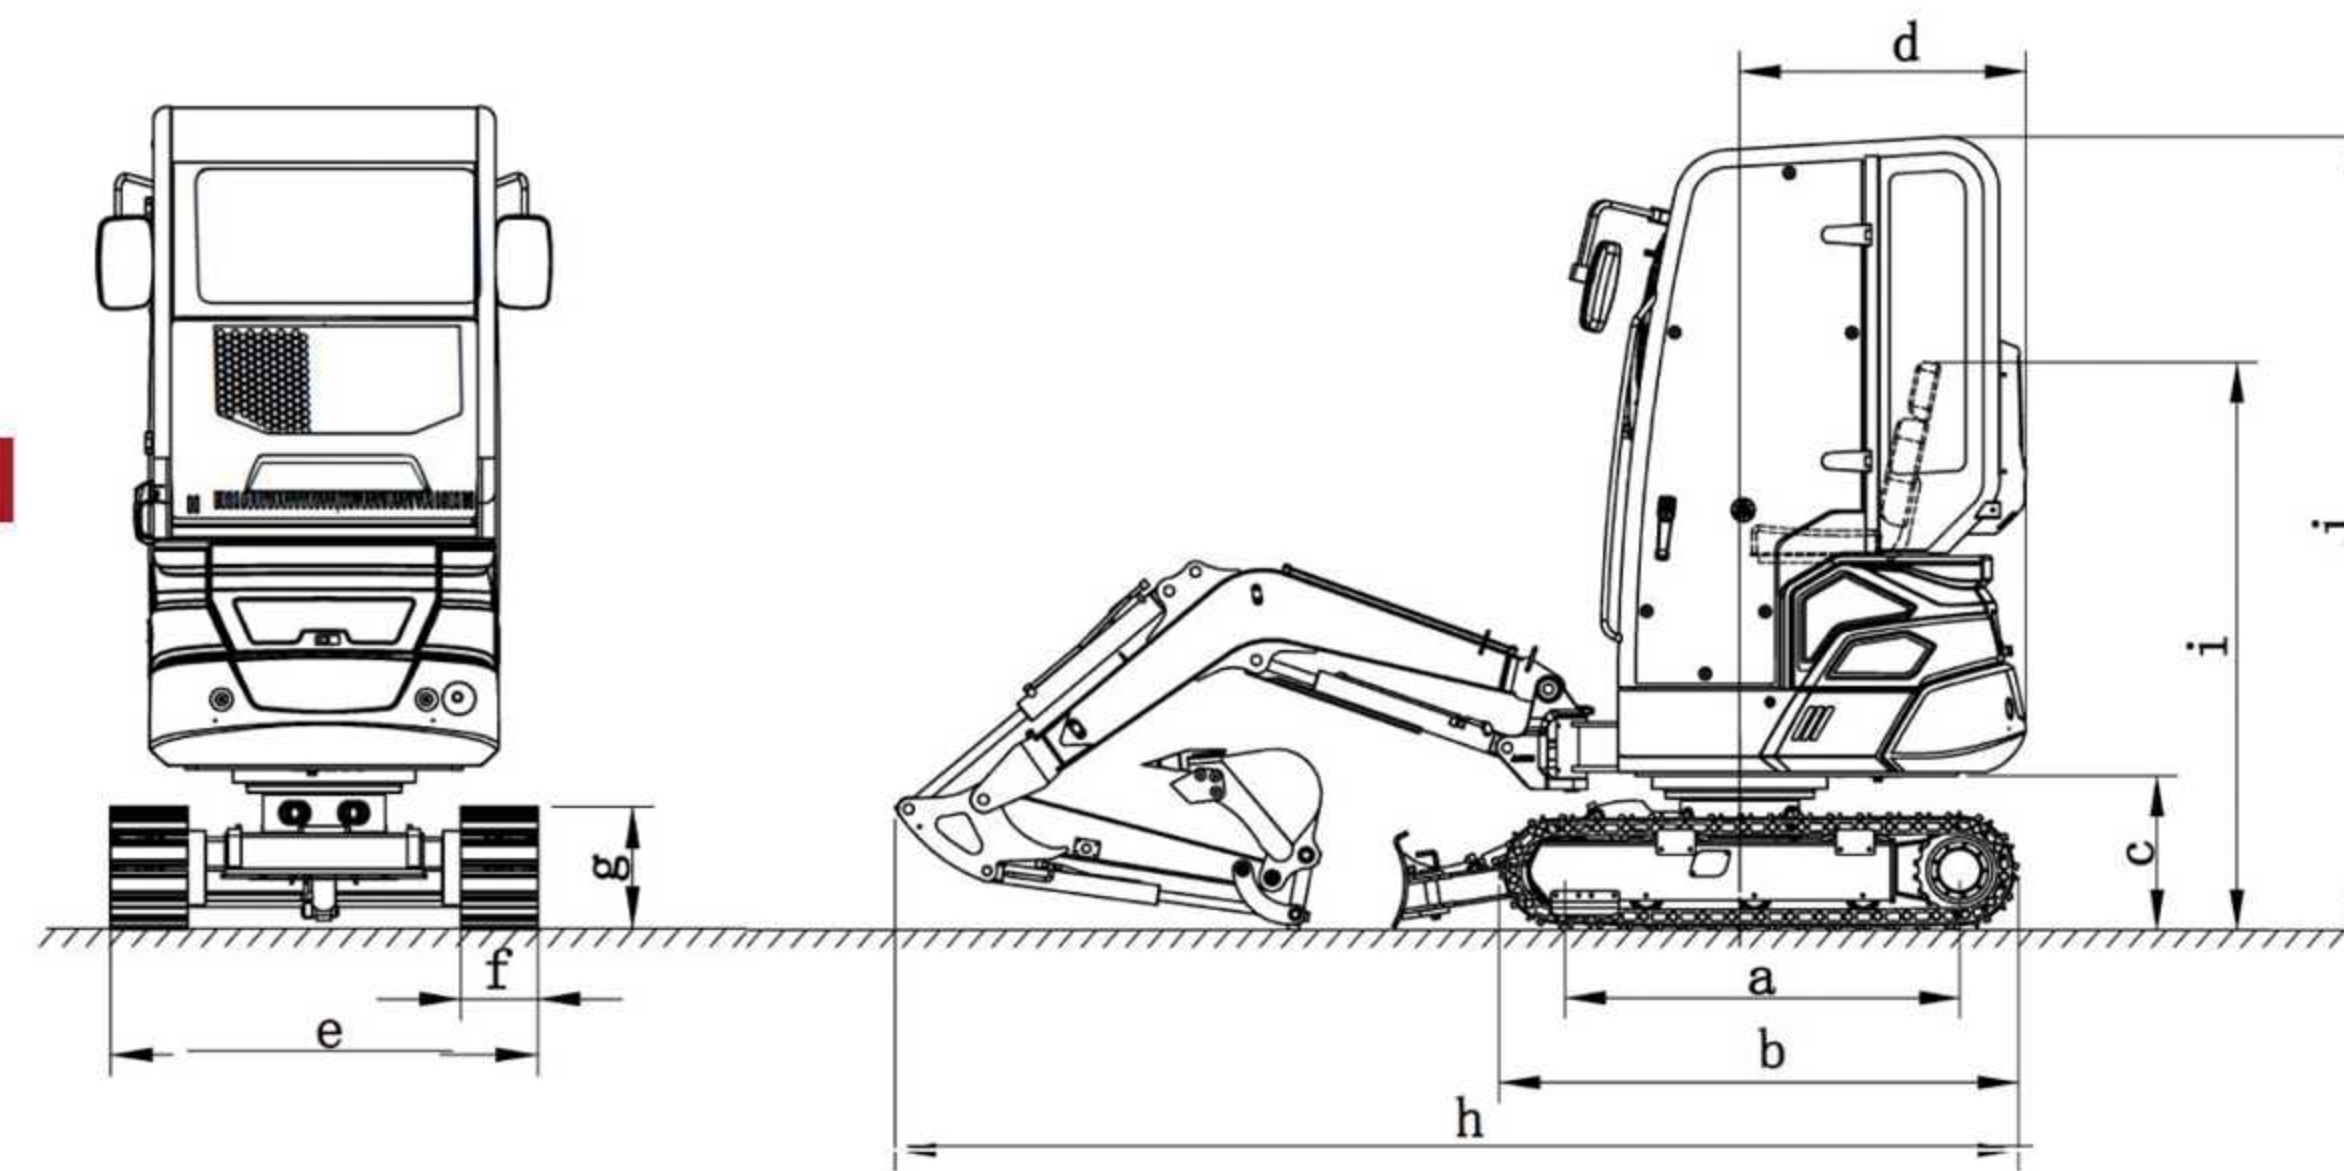

www.rhinoexcavator.com

MAIN DIMENSION		
a	Wheel base	mm 1230
b	Track length	mm 1590
c	Upper chassis ground clearance	mm 473
d	Counterweight turning radius	mm 885
e	Chassis width	mm 1025 (1275)
f	Track width	mm 230
g	Track height	mm 360
h	Transportation length	mm 3475
i	Height of seat to ground	mm 1750
j	Overall height	mm 2455
m	Boom swing - left	mm 390
n	Boom swing - right	mm 510

OPERATING RANGE		
A	Max. digging radius on ground	mm 3610
B	Max. digging radius	mm 3700
C	Max. digging depth	mm 2150
D	Max. digging height	mm 3275
E	Max. unloading height	mm 2310
F	Max. vertical digging depth	mm 1740
G	Min. turning radius	mm 1580
H	Max. lifting height dozer blade	mm 275
I	Max. depth dozer blade	mm 180

SPECIFICATION		
Operating weight		2030kg
Standard bucket capacity		0.045 cbm
Working device type		Backhoe
Engine	Model No.	KUBOTA D1105
	Displacement	1.123L
	Rated power/rpm	14.2Kw
	Max. torque	71.4N.m
Speed	Max. travel speed	3.3/2.2km/h
	Swing speed	10.5rpm
	Max. Grade ability	30°
Tracks	Ground specific pressure	41.3KPa
	Material	Rubber or steel
	Type of tensioner	Grease cylinder
Hydraulic system	Pump type	Piston pump
	Working pressure	22MPa
	Flow rate	39.6L/min
Capacity	Hydraulic oil tank capacity(L)	15.3L
	Fuel tank capacity(L)	18L



Valve:TAIFENG
Pump:TAIFENG
Swing motor:EDDIE
Traveling motor:EDDIE
Cylinder :SUQINGGE



SHANDONG KEN STONE HEAVY MACHINERY CO.,LTD



Address : Dingyuanzhai Industrial Park,Guan County,Liaocheng city, Shandong Province, China
Postal code : 252512
Website : www.rhinoexcavator.com
E-mail : office@sdxiniu.com

Factory visit

XN20B

CRAWLER EXCAVATOR